

High-Definition Analog Video TVI/CVI/AHD to Fiber Converter


Introduction

Our 16-Ch TVI/CVI/AHD TO Fiber Converters is universal type supporting High Definition Analog video format HD-TVI / HD-CVI / AHD , can simultaneously transmit 16 channels video and 1-ch RS485 over one core multimode or single-mode optical fiber. It also supports the regular analog video format such as PAL / NTSC /SECAM , it is a kind of universal fiber transmission solution / product for CCTV analog video/data signals . Devices are available for either standalone or rack-mount installation, which is suitable for different working environment . Electronic and optical adjustments are never required. LED indicators are provided for instantly monitoring system status.

Features

- Lossless non-compression real time transmission.
- CWDM technology offer 3.2G bandwidth to each 4chs video , support higher performance
- Automatically identify formats of input video : AHD/TVI/CVI/PAL/NTSC/SECAM
- Support 720P/25/30/50Hz , 960P/25/30Hz,1080P/30Hz
- Advanced lightning protection design ,support 5.7KV lightning protection
- Through LED indicators to inform its functional mode
- Industrial wide range of operational temperature
- Stand-alone or Rack-mounted, simple installation.

AHD TO Fiber Converter System connection diagram

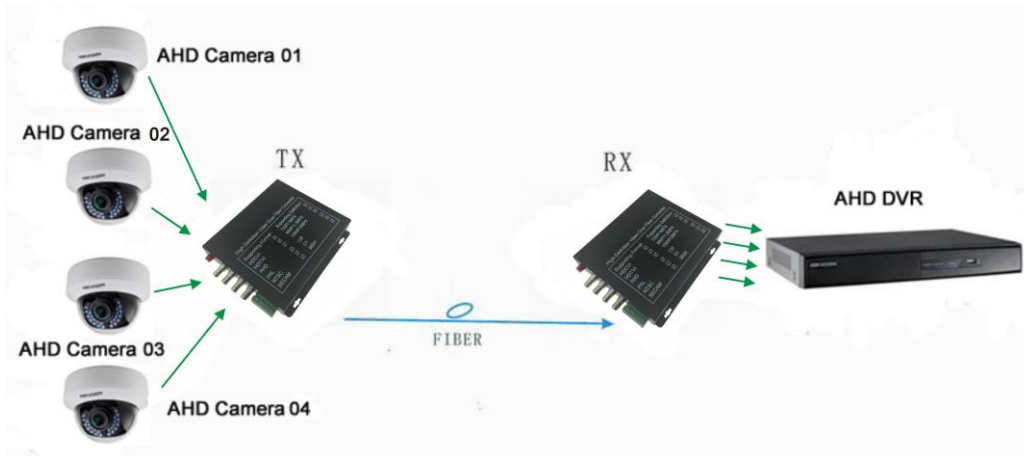

Technical Specification

Optics:

Wavelength	CWDM:1310nm/1550nm/1470nm/1490nm/1570nm
Output Power	-8~-3dBm
Optic fiber	50/125u multimode, 62.5/125u multimode, 9/125u single mode
Rx sensitivity	-26dBm
Optical connector	FC、ST、SC (optional)
Distance	0~550M (MM) / 0~80KM (SM) (Default distance is 20Km)

Video:

Number of Channels	16
Input/output impedance	75 Ohm (unbalance)
Standard video input/output voltage	1.0Vp-p
Video Bandwidth	50MHz
Sampling Bandwidth	8bit
Sampling Frequency	108MHz
Signal to noise ratio	>67dB
Rise and Fall time	<0.8ns
Optical Signal Intrinsic Jitter	<0.2 UI
Differential Gain	< ±1.5%

Differential Phase	< $\pm 1^\circ$
Connector	BNC
Supporting video pixel	1280(H)x720(V)@30Hz/1MPX 1280(H)x720(V)@50Hz/1MPX 1280(H)x960(V)@30Hz/1.3MPX 1920(H)x1080(V)@30Hz/2MPX

Data:

Protocol	RS485 (RS232/RS422 Optional)
Number of channels	1
Connector	9pins Terminal Blocks
Data Rate	0-200Kbps
Directions	Default :Simplex from Rx to Tx (BIDI duplex optional)

Mechanical Structure & Environment

Power	DC5V 3A
Power Consumption	$\leq 10W$
Working Temperature	-15°C ~65°C
Storage Temperature	-40°C ~85°C
Relative Humidity	5%~95% (no condensation)
MTBF	≥ 100000 Hours

Ordering information

Model Number	Product Configuration	Remark	Fiber Mode	Wavelengths	Transmission Distance
TS-AHD-16000T/R	16Ch Forward AHD Video 1080P	FC/SC/ST	Single-mode	CWDM 1310/1470/1490 /1550nm	20Km
TS-AHD-16100T/R	16Ch Forward AHD Video	FC/SC/ST	Single-mode	CWDM	20Km

	1080P +1 Ch Reverse Data			1310/1550/1470 /1490/1570 nm	
--	--------------------------	--	--	---------------------------------	--

Packing information

Dimensions of products (Pcs per Tx or Rx)					
Module name	Configuration	Long (mm)	Wide(mm)	High(mm)	Volume(mm ³)
TS-AHD-16000T/R	16-Ch video 1080P	438	173	44	3334056
TS-AHD-16100T/R	16-Ch video 1080P + 1-Ch RS485 data	438	173	44	3334056
Dimensions of packing box(pair/ Tx + Rx)					
Module name	Configuration	Long (mm)	Wide(mm)	High(mm)	Volume(mm ³)
TS-AHD-16000T/R	16-Ch video 1080P	542	285	185	28576950
TS-AHD-16100T/R	16-Ch video 1080P + 1-Ch RS485 data	542	285	185	28576950
Shipping weight (pair /Tx+Rx & power adaptors & packages)					
Module name	Configuration	weight (kg)		Package type	
TS-AHD-16000T/R	16-Ch video 1080P	5.25		Carton box	
TS-AHD-16100T/R	16-Ch video 1080P + 1-Ch RS485 data	5.3		Carton box	

Remark :

- Optical transmission distance is limited to optical loss of the fiber and any additional loss introduced by connectors, splices and patch panels.
- Maximum transmission distance is also limited by fiber bandwidth.
- Power adapter for stand-alone units is manufactured by third party .Power adapter included US, European, UK or Australian power plug.
- Please feel free to contact factory for any special requirement and customization